

Environmental Certification Scheme

Carpet Name: ARGON

Licensee: VICTORIA CARPETS

Licence Number: 1005

Label Number: 18057

Certification Approved: 29/06/2011


Level: 3

ACCS Contract Grading: CHD 3*

ACCS Residential Grading: REHD2 6*

Suitable for Stairs: Yes

Date Printed: 8/06/2018

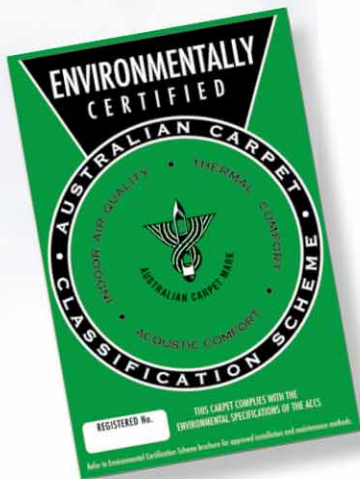

Allan Firth



Allan Firth
Secretary ACCS



Administered by the Carpet Institute of Australia Limited ABN 11 006 829 303

PO Box 7172, St Kilda Road, Melbourne Victoria 8004 Tel: (03) 9804 5559 • Fax: (03) 9804 5560

Email: info@carpetoz.com.au • www.carpetinstitute.com.au

This certificate remains the property of the Carpet Institute of Australia Limited.

Carpet Details:

Company: VICTORIA CARPETS

Label No: 18057

Licence No: 1005

Office No: 6663

Names:

ARGON

Details:

Awarded Res Grade: REHD2 6*
 Awarded Con Grade: CHD 3*
 Registered On: 08/06/2018
 Active: Yes
 Date In-Active:
 Manufacture Method: Tufted
 Twist Set: N/A
 Dyeing Method: Melt Dyed
 #Colours/Designs: 8
 Backing Type: PVC
 Felted: N/A
 Spinning System: BCF
 Insect Resist Agent: N/A
 Filament: /
 Master Product: 11105

Test Results:

Pile Mass g/m² (oz/yd²): 610 (18.0)
 SPM g/m² (oz/yd²): 380 (11.2)
 Stated Pile Height (mm): 3.0
 Minimum Pile Height (mm): 2.0
 Maximum Pile Height (mm): 3.0
 Dynamic Loading Loss (%): 25.8
 Static Loading Loss (%): 22.6
 Tex (g/1000m): 268
 Measured Pile Thickness (mm): 3.1
 Machine Gauge (Tufts/dm): 50.4
 Meas Tufts Perp to Selvedge: 48.0
 Meas Tufts Para to Selvedge: 47.0
 Treated For Soiling Resistance: Yes
 Soil Resist Inhibitor: No
 Stain Resist Inhibitor: Yes

Hexapod Scores:

	Texture		Colour		Thickness	
	WA	WA	WA	WA	(mm)	(%)
1500:	4.0	4.0	4.5	4.5	0.5	16.1
8000:	3.0	3.0	3.5	3.5	1.3	41.9

Quality Assurance Test:

Cut Pile (%): 0
 Loop Pile (%): 100
 Panel Assessment Contract: 14
 Panel Assessment Residential: 14
 Suitable For Stairs: Yes
 Tile: Yes SheetGoods: No
 Fibre Signature: NBA:100

ACCS Test:

	Con	Res	Max
SPM/PH Ratio:	15.8	16	16
Volume Density:	16.9	16.9	20
Tuft Density:	9	9	9
Dyn Load:	3	3	5
Stat Load:	3	3	5
Soiling Prop:	13	13	16
Abrasion Res:	9.7	9.7	10
Sub Total:	70.4	70.6	81
Panel Assess:	14	14	19
Total:	84.4	84.6	100
Calc Residential Grade:	REHD2	6*	
Calc Contract Grade:	CHD	3*	

Calculations

Pile Height(mm): 3.0
 Tuft Density(per dm²): 2256.0
 GSPM(g/m²): 390.0
 GSPM (abrasive) (g/m²): 275.0
 Soiling Propensity: 12.0 +1.0

OAF Values

OAF: 4.9
 Calc Density (+-5%): 0.12 0.123 0.13
 Base Fibre: NYLON
 Benchmarks:
 RHD1 0 RHD2 3.5
 REHD1 3.5 REHD2 3.5

Environmental Classification:

ECS: Yes
 Level: 3

	Calc	B/M	P/F
Acoustic:	3.1	3	PASS
Thermal:	25.3	15	PASS
VOC:			
TVOC	58		

Notes:

8/06/2018 - Cloned From Master - (11105) by R Canovan.